41



COMFORT

Quiet Operation

By optimizing the design of fan motor, air duct and heat exchanger, the new duct operates with noise as low as 22dB(A), creating a quieter and more comfortable environment.





0.5°C/1°C Setting Temperature Adjustment


Set temperature can be adjusted in 0.5°C or 1°C steps, enabling precise comfort control.





Auto Cooling-heating Changeover


Automatically selects cooling or heating mode to achieve the set temperature.



AIR FLOW

Adaptive Duct Length and Filter Resistance

By digital fan motor and a specially designed independent drive chip enables precise control and output on demand. It can automatically adapt to duct lengths from 10 to 160 Pa equivalent static pressure without intervention from the installer.

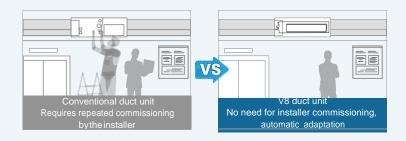

HEALTH

Optional High Efficiency HEPA Filter*

A static pressure of up to 160 Pa enables the application of medical-grade HEPA filters, and even small capacity models can be equipped with high-efficiency filters, efficiently filtering fine particles of 0.5 microns with an efficiency of over 99%.




* This function is available as a customization option.

43

EASY INSTALLATION

Thin Body with High ESP

All models have a static pressure of 160 Pa and a thickness of only 245 mm. The high static pressure allows air to be delivered over longer distances without loss of cooling and heating effect. Especially suitable for long and narrow spaces.




3 Way flexible installation

It is possible to install and connect the outdoor unit in 3 different ways for Duct, providing flexibility to accommodate a wide range of room designs.



High-lift drain pump

A drain pump with a 1200mm raise height is fitted as standard, simplifying installation of the drain piping.



Fault Feedback

Early warning of drain pump fault.

